

This is a self-archived version of an original article. This version may differ from the original in pagination and typographic details.

Author(s): Banichuk, Nikolay; Makeev, Evgeny; Neittaanmäki, Pekka; Tuovinen, Tero

Title: Stability of Thermoelastic Layered Composite in Axial Movement

Year: 2018

Version: Accepted version (Final draft)

Copyright: © The Authors, 2018.

Rights: In Copyright

Rights url: <http://rightsstatements.org/page/InC/1.0/?language=en>

Please cite the original version:

Banichuk, N., Makeev, E., Neittaanmäki, P., & Tuovinen, T. (2018). Stability of Thermoelastic Layered Composite in Axial Movement. In R. Owen, R. D. Borst, J. Reese, & C. Pearce (Eds.), ECCM - ECFD 2018 : Proceedings of the 6th European Conference on Computational Mechanics (Solids, Structures and Coupled Problems) and the 7th European Conference on Computational Fluid Dynamics (pp. 3723-3732). International Center for Numerical Methods in Engineering. <http://www.eccm-ecfd2018.org/frontal/docs/Ebook-Glasgow-2018-ECCM-VI-ECFD-VII.pdf>

STABILITY OF THERMOELASTIC LAYERED COMPOSITE IN AXIAL MOVEMENT

NIKOLAY BANICHUK¹, EVGENY MAKEEV², PEKKA
NEITTAANMAKI³ AND TERO TUOVINEN⁴

¹ Ishlinsky Institute for Problems in Mechanics, Russian Academy of Sciences, Moscow,
Russian Federation
Prospekt Vernadskogo, 101-1, Moscow 119526 Russia
banichuk@ipmnet.ru

² Ishlinsky Institute for Problems in Mechanics, Russian Academy of Sciences, Moscow,
Russian Federation
Prospekt Vernadskogo, 101-1, Moscow 119526 Russia
makeev@ipmnet.ru

³ Faculty of Information Technology, University of Jyväskylä, Finland
Mattilanniemi 2, 40014 Jyväskylä
pekka.neittaanmaki@jyu.fi

⁴ Faculty of Information Technology, University of Jyväskylä, Finland
Mattilanniemi 2, 40014 Jyväskylä
tero.tuovinen@jyu.fi

Key words: Composite, Layered panels, Stability, Thermoelastic material, Axial movement

Abstract. In this paper we study mechanical model for a layered thermoelastic composite and its stability in high-speed axially movement. We consider statical forms of the loss of stability and apply some approaches, based on averaging of the thermomechanical characteristics of layered composite materials and find some effective modulus of the considered composite structures.

1 INTRODUCTION

In our previous studies (see e.g., Banichuk et al. [1], [2], [3], [4], [5], [6]), we have considered many aspects of mathematical modelling of axially moving materials. Examples include the processing of paper or steel, fabric, rubber or some other continuous material, and looping systems such as band saws and timing belts. In this article, we have will extend our studies focusing now on layered composites and their thermoelastic stabilities in movement.

Frequently used models for systems of axially moving material have been travelling flexible strings, membranes, beams, and plates. The dynamic and stability aspects discussed in this paper were first reviewed in the article by Mote [7]. Natural frequencies are

commonly analyzed together with the stability. It was realized early on that the vibration problem for an axially moving continuum is not the a conventional one. Because of the longitudinal continuity of the material, the equation of motion for transverse vibration will contain additional terms, representing a Coriolis force and a centripetal force acting on the material. As a consequence, the resonant frequencies will be dependent on the longitudinal velocity of the axially moving continuum, as was noted by Archibald and Emslie [8], as well as Swope and Ames [9], Simpson [10], and Mujumber and Douglas [11].

Travelling beams have been further analyzed by e.g. Parker [12] in his study on gyroscopic continua, and by Kong and Parker [13], where an approximate analytical expression was derived for the eigenfrequencies of a moving beam with small flexural stiffness. Response predictions have been made for particular cases where the excitation assumes special forms, such as harmonic support motion, see Miranker [14], or a constant transverse point force as presented by Chonan [15]. Arbitrary excitations and initial conditions were analyzed with the help of a modal analysis and the Green's function method in the article by Wickert and Mote [16]. As a result, the critical speeds for travelling strings and beams were explicitly determined. Travelling strings and beams on an elastic foundation have been investigated by, e.g., Bhat et al. [17], Perkins [18], Wickert [19] and Parker [20].

The loss of stability was studied with an application of dynamic and static approaches in the article by Wickert [21]. It was shown by means of numerical analysis that in all cases instability occurs when the frequency is zero and the critical velocity coincides with the corresponding velocity obtained from static analysis. The dynamical properties of moving plates have been studied by Shen et al. [22] and by Shin et al. [23], and the properties of a moving paper web have been studied in the two-part article by Kulachenko et al. [24, 25]. Critical regimes and other problems of stability analysis have been studied e.g. by Wang [26] and by Sygulski [27].

The results indicating that axially moving beams experience divergence instability at a sufficiently high beam velocity have been obtained also for beams interacting with external media; see, e.g., study by Chang and Moretti [28]. In a study by Banichuk et al. [29], the authors extended these ideas to a two-dimensional model of the web, considered as a moving plate under homogeneous tension but without external media. The most straightforward and efficient way to study stability is to use a linear stability analysis.

In an article by Hatami et al. [30], the free vibration of a moving orthotropic rectangular plate was studied at sub- and supercritical speeds, and its flutter and divergence instabilities at supercritical speeds. The study is limited to simply supported boundary conditions at all edges. For the solution of equations of orthotropic moving material, many necessary fundamentals can be found in the work by Marynowski et. al (see e.g. [31] and [32]).

In the present study, we will limit our focus to moving layered composites. We consider the statical forms of the loss of stability and apply some approaches, based on averaging of the thermomechanical characteristics of layered composite materials and find some effective modulus of the considered composite structures. We will perform the studies mainly using analytical approaches. The article is structured in the following manner.

First, we will formulate equations for the instability of a homogeneous thermoelastic continuous panel in the Section 2. In the Section 3, we consider a layered thermoelastic composites. Finally, in the Section 4 we will draw conclusions.

The summarizing result of this article is that in the case of the considered multilayered composite, we have realized the technique of averaging of thermomechanical properties of different layers and found the effective composite characteristics. This has been done using basic material properties and taking into account that there is no sliding and discrepancies between layers. By using the found averaged effective modulus including combined effective characteristics, the required values were obtained and used in the final formulas for critical velocities and temperatures of a moving composite.

2 STABILITY OF THE HOMOGENEOUS THERMOELASTIC CONTINUOUS PANEL IN AXIAL MOVEMENT

The homogeneous panels are mechanically simple supported at the inflow ($x = -\ell$) and out-flow ($x = \ell$) boundaries of the panels. The panels are travelling at a constant velocity V_0 in the x -direction of the rectangular global coordinate system and are loaded by axial tension T_0 and thermal loads. The length 2ℓ and the total thickness H are supposed to be given, while $-\ell < x < \ell$ and $-H/2 < z < H/2$.

Free transverse vibrations of a homogeneous panel axially moving with constant velocity and loaded by axial tension and heated by some temperature are described by the following equation for transverse displacement w and simply supported boundary conditions

$$m \left(\frac{\partial^2 w}{\partial t^2} + 2V_0 \frac{\partial^2 w}{\partial x \partial t} + V_0^2 \frac{\partial^2 w}{\partial x^2} \right) = \left(T_0 - \frac{EH}{1-\nu} \varepsilon_\theta \right) \frac{\partial^2 w}{\partial x^2} - D \frac{\partial^4 w}{\partial x^4} \quad (1)$$

$$(w)_{x=-\ell} = 0, \quad \left(\frac{\partial^2 w}{\partial x^2} \right)_{x=-\ell} = 0, \quad (w)_{x=\ell} = 0, \quad \left(\frac{\partial^2 w}{\partial x^2} \right)_{x=\ell} = 0 \quad (2)$$

where m , E , ν , D are, respectively, the mass per unit area, Young's modular, Poisson ratio, bending rigidity ($D = EH/12(1-\nu^2)$) and the deformation ε_θ is defined as

$$\varepsilon_\theta = \alpha_0 \theta, \quad \theta = \theta_a - \theta_0. \quad (3)$$

Here α_0 is a linear expansion coefficient, θ is the temperature discrepancy, θ_0 is the temperature of zero deformation, θ_a is the actual temperature.

In a stationary case, when

$$\frac{\partial w}{\partial t} = \frac{\partial^2 w}{\partial t^2} = 0 \quad (4)$$

the transverse displacement $w = w(x)$ satisfies the equation

$$\frac{d^4 w}{dx^4} + \lambda \frac{d^2 w}{dx^2} = 0 \quad (5)$$

where parameter λ (eigenvalue) is given by the expression

$$\lambda = \frac{1}{D} \left(mV_0^2 + \frac{EH}{(1-\nu)} \alpha_0 \theta - T_0 \right) = f(V_0^2, \theta). \quad (6)$$

If we introduce a new unknown variable $\Psi(x)$ as

$$\Psi(x) = \frac{d^2 w}{dx^2}, \quad -\ell \leq x \leq \ell \quad (7)$$

we obtain the following spectral problem

$$\frac{d^2 \Psi}{dx^2} + \lambda \Psi = 0 \quad (8)$$

$$\Psi(-\ell) = 0, \quad \Psi(\ell) = 0. \quad (9)$$

Here the value λ plays the role of an eigenvalue. A nontrivial solution to the formulated eigenvalue problem can be represented as

$$\Psi(x) = C_1 \sin\left(\sqrt{\lambda} \left(\frac{x+\ell}{2}\right)\right) + C_2 \cos\left(\sqrt{\lambda} \left(\frac{x+\ell}{2}\right)\right) \quad (10)$$

with two arbitrary coefficients C_1 and C_2 and an unknown value λ . Taking into account (9) and (10) we will have $C_2 = 0$ and

$$\lambda = \left(\frac{j\pi}{\ell}\right)^2, \quad j = 1, 2, \dots \quad (11)$$

$$\Psi(x) = C_1 \sin\left(\frac{j\pi}{2\ell}(x+\ell)\right) \quad (12)$$

with arbitrary constant C_1 .

Thus, for given problem parameters $D, E, \nu, H, \ell, T_0, m, V_0, \alpha_\theta$ we obtain the critical temperature θ^{div} of instability (divergence of buckling)

$$\theta^{\text{div}} = \frac{(1-\nu)}{EH\alpha_\theta} \left\{ D \left(\frac{\pi}{\ell}\right)^2 + T_0 - mV_0^2 \right\} \quad (13)$$

and

$$\lambda_{\min} = \left(\frac{\pi}{\ell}\right)^2 \quad (14)$$

corresponding the minimal $j = 1$ in the equation (11).

Analogously we find the critical instability velocity (squared) $(V_0^2)^{\text{div}}$ as:

$$(V_0^2)^{\text{div}} = \frac{1}{m} \left\{ D \left(\frac{\pi}{\ell}\right)^2 + T_0 - \frac{EH\theta\alpha_\theta}{(1-\nu)} \right\} \quad (15)$$

where $D, E, \nu, H, \ell, \theta, \alpha_\theta, m$ are considered as a given positive parameters. The safety domain for stability in the values (θ, V_0^2) is defined by the inequality

$$f(V_0^2, \theta) < \lambda_{\min} = \left(\frac{\pi}{\ell}\right)^2 \quad (16)$$

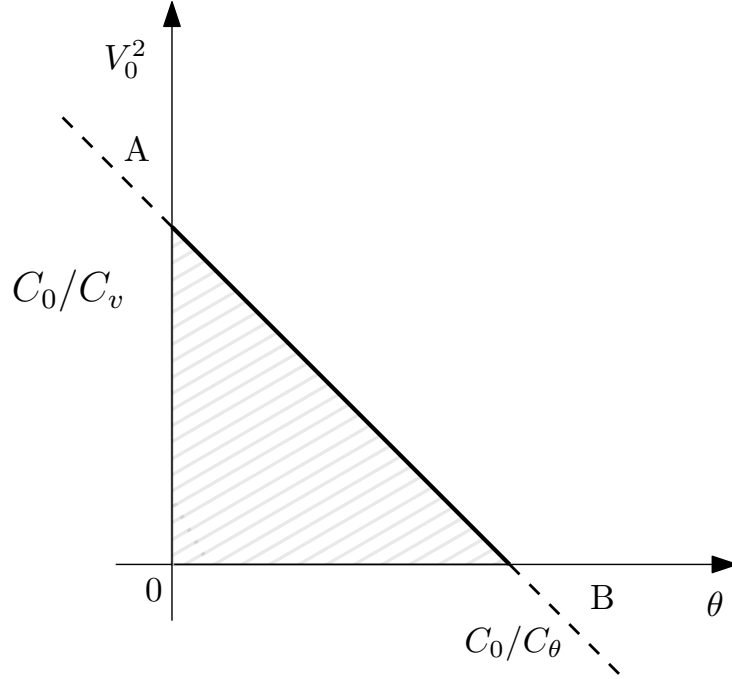


Figure 1: Safety domain OAB .

that is reduced to the condition

$$F(V_0^2, \theta) \equiv \frac{1}{D} \left(\frac{\ell}{\pi} \right)^2 f(V_0^2, \theta) = C_v V_0^2 + C_\theta \theta - C_0 < 0 \quad (17)$$

where

$$\begin{aligned} C_v &= \frac{m}{D} \left(\frac{\ell}{\pi} \right)^2 \\ C_\theta &= \frac{EH\alpha_\theta}{D(1-\nu)} \left(\frac{\ell}{\pi} \right)^2 \\ C_0 &= \frac{T_0}{D} \left(\frac{\ell}{\pi} \right)^2 + 1 \end{aligned} \quad (18)$$

The safety domain of the values V_0^2 , θ has a triangular shape OAB shown in the Figure 1.

3 LAYERED THERMOELASTIC COMPOSITE

Consider the layered panel that is symmetrically composed with respect to a middle plane (see Figure 2) and consist of $2n+1$ (odd number) thermoelastic layers characterized by mass per unit area m_i , Young's modulus E_i , Poisson ratio ν_i , coefficient $(\alpha_\theta)_i$ and distances h_i from the symmetry of internal panel structure, i.e.

$$E(z) = E(-z), \quad \nu(z) = \nu(-z), \quad \alpha_\theta(z) = \alpha_\theta(-z) \quad (19)$$

and derive the expressions for effective moduli D^{ef} , ν^{ef} , $\varepsilon_{\theta}^{\text{ef}}$ and m^{ef} . To this end we apply the formulas for stresses and strains and the expression for bending moment

$$\int_{-H/2}^{H/2} \sigma_x z dz = \left(2 \int_0^{H/2} \frac{z^2 E(z) dz}{1 - (\nu(z))^2} \right) \frac{\partial^2 w}{\partial x^2} = D^{\text{ef}} \left(\frac{\partial^2 w}{\partial x^2} \right). \quad (20)$$

Thus we find the expression for effective bending rigidity in the form

$$D^{\text{ef}} = 2 \int_0^{H/2} \frac{z^2 E(z)}{1 - (\nu(z))^2} dz. \quad (21)$$

Using mechanical and geometric characteristics of the panel layers E_i , ν_i , h_i we evaluate the integral in the equation (21). We will have the following formula

$$D^{\text{ef}} = \frac{2}{3} \frac{E_{n+1}}{1 - \nu_{n+1}^2} h_{n+1}^3 + \frac{2}{3} \sum_{i=1}^n \frac{E_i}{1 - \nu_i^2} (h_i^3 - h_{i+1}^3). \quad (22)$$

In an analogous manner, we derive the formulas for an effective Poisson's ratio ν^{ef} and for effective thermal deformation $\varepsilon_{\theta}^{\text{ef}}$ of a nonhomogeneous isotropic layered panel. We have

$$\begin{aligned} \nu^{\text{ef}} &= \frac{2}{D^{\text{ef}}} \int_0^{H/2} \frac{z^2 \nu(z) E(z)}{1 - (\nu(z))^2} dz = \\ &= \frac{2}{3D^{\text{ef}}} \left[\frac{\nu_{n+1} E_{n+1} h_{n+1}^3}{1 - \nu_{n+1}^2} + \sum_{i=1}^n \frac{E_i \nu_i}{1 - \nu_i^2} (h_i^3 - h_{i+1}^3) \right] \end{aligned} \quad (23)$$

$$\varepsilon_{\theta}^{\text{ef}} = \frac{2}{H} \int_0^{H/2} \alpha_{\theta}(z) \theta dz = \frac{2}{H} \left\{ (\alpha_{\theta})_{n+1} \theta_{n+1} h_{n+1} + \sum_{i=1}^n (\alpha_{\theta})_i \theta_i (h_i - h_{i+1}) \right\} \quad (24)$$

Besides that we have the following expression for m^{ef} :

$$m^{\text{ef}} = m_{n+1} + 2 \sum_{i=1}^n m_i. \quad (25)$$

We derive also the corresponding formula for a joint expression

$$a(z) = \frac{HE(z)}{1 - \nu(z)} \varepsilon_{\theta}(z) = \frac{HE(z)}{1 - \nu(z)} \alpha_{\theta}(z) \theta(z) \quad (26)$$

in the following form

$$a^{\text{ef}} = \frac{2}{H} \int_0^{H/2} a(z) dz = 2 \left\{ \frac{(\alpha_{\theta})_{n+1} E_{n+1} \theta_{n+1}}{1 - \nu_{n+1}} h_{n+1} + \sum_{i=1}^n \frac{(\alpha_{\theta})_i E_i \theta_i}{1 - \nu_i} (h_i - h_{i+1}) \right\}. \quad (27)$$

The last formula contains many particular cases. Thus, if the Poisson's ratio and the temperature are the same for all materials, i.e.

$$\nu_1 = \nu_2 = \nu_3 = \dots = \nu_{n+1} = \nu, \quad (28)$$

$$\theta_1 = \theta_2 = \theta_3 = \dots = \theta_{n+1} = \theta \quad (29)$$

then we will have

$$a^{\text{ef}} = \frac{2\theta}{1-\nu} \left\{ (\alpha_\theta)_{n+1} E_{n+1} h_{n+1} + \sum_{i=1}^n (\alpha_\theta)_i E_i (h_i - h_{i+1}) \right\} \quad (30)$$

If besides (28), (29) the Young's modulus are equal for all layers, i.e.

$$E_1 = E_2 = E_3 = \dots = E_{n+1} = E \quad (31)$$

then we obtain

$$a^{\text{ef}} = \frac{2E\theta}{1-\nu} \left\{ (\alpha_\theta)_{n+1} h_{n+1} + \sum_{i=1}^n (\alpha_\theta)_i (h_i - h_{i+1}) \right\}. \quad (32)$$

To use the obtained results (18)-(32) for a stability analysis we will take (13), (15) and suppose that

$$D = D^{\text{ef}}, \quad \nu = \nu^{\text{ef}}, \quad a = a^{\text{ef}}, \quad m = m^{\text{ef}} \quad (33)$$

in the equations (13), (15). We will have

$$(V_0^2)^{\text{div}} = \frac{1}{m^{\text{ef}}} \left\{ D^{\text{ef}} \left(\frac{\pi}{\ell} \right)^2 + T_0 - a^{\text{ef}} \right\} \quad (34)$$

$$\theta^{\text{div}} = \frac{1}{b^{\text{ef}}} \left\{ D^{\text{ef}} \left(\frac{\pi}{\ell} \right)^2 + T_0 - a^{\text{ef}} \right\} \quad (35)$$

where

$$b^{\text{ef}} = \left(\frac{EH\alpha_\theta}{1-\nu} \right)^{\text{ef}} = 2 \left\{ \frac{(\alpha_\theta)_{n+1} E_{n+1}}{1-\nu_{n+1}} + \sum_{i=1}^n \frac{(\alpha_\theta)_i E_i}{1-\nu_i} (h_i - h_{i+1}) \right\} \quad (36)$$

4 SOME NOTES AND CONCLUSIONS

In this paper the stability problems have been studied for homogeneous thermoelastic panels and for nonhomogeneous layered composites that perform axial movement. The critical velocities of instability and critical temperatures of buckling have been presented in an analytical form. The safety domains of principal parameters were obtained and presented in the paper. This result can be used in the engineering practice for tuning the parameters of mechanical systems to optimize the efficiency of production processes.

In the case of the considered multilayered composite we realized the technique of averaging of thermomechanical properties of different layers and found the effective composite

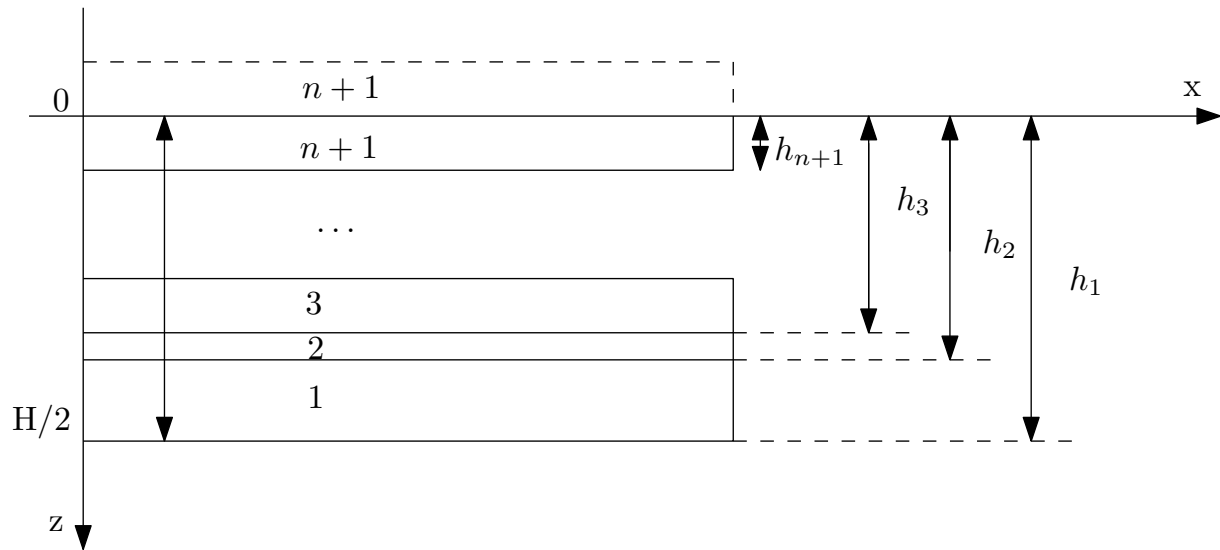


Figure 2: Cross-sectional of the panel modelled as a layered continuous composite.

characteristics. This has been done using basic material properties and taking into account that there is no sliding and discrepancies between layers. Using the found averaged effective modulus including combined effective characteristics the required values were obtained and used in the final formulas for critical velocities and temperatures of a moving composite.

Acknowledgements: The work was supported by the Russian Science Foundation (project no 17-19-01247).

REFERENCES

- [1] N. Banichuk, M. Kurki, P. Neittaanmäki, T. Saksa, M. Tirronen, and T. Tuovinen. Optimization and analysis of processes with moving materials subjected to fatigue fracture and instability. *Mechanics Based Design of Structures and Machines: An International Journal*, 41(2):146–167, 2013.
- [2] N. Banichuk, J. Jeronen, P. Neittaanmäki, T. Saksa, and T. Tuovinen. Theoretical study on travelling web dynamics and instability under non-homogeneous tension. *International Journal of Mechanical Sciences*, 66C:132–140, 2013.
- [3] N. Banichuk, J. Jeronen, M. Kurki, P. Neittaanmäki, T. Saksa, and T. Tuovinen. On the limit velocity and buckling phenomena of axially moving orthotropic membranes and plates. *International Journal of Solids and Structures*, 48(13):2015–2025, 2011.
- [4] N. Banichuk, J. Jeronen, P. Neittaanmäki, and T. Tuovinen. Static instability analysis for travelling membranes and plates interacting with axially moving ideal fluid. *Journal of Fluids and Structures*, 26(2):274–291, 2010.

- [5] N. Banichuk, J. Jeronen, P. Neittaanmäki, T. Saksa, and T. Tuovinen. *Mechanics of moving materials*, volume 207 of *Solid mechanics and its applications*. Springer, 2014. ISBN: 978-3-319-01744-0 (print), 978-3-319-01745-7 (electronic).
- [6] N. Banichuk and S. Ivanova. *Optimal Structural Design: Contact Problems and High-Speed Penetration*. Walter de Gruyter GmbH & Co KG, 2017.
- [7] C. D. Mote. Dynamic stability of axially moving materials. *Shock and Vibration Digest*, 4(4):2–11, 1972.
- [8] F. R. Archibald and A. G. Emslie. The vibration of a string having a uniform motion along its length. *ASME Journal of Applied Mechanics*, 25:347–348, 1958.
- [9] R. D. Swope and W. F. Ames. Vibrations of a moving threadline. *Journal of the Franklin Institute*, 275:36–55, 1963.
- [10] A. Simpson. Transverse modes and frequencies of beams translating between fixed end supports. *Journal of Mechanical Engineering Science*, 15:159–164, 1973.
- [11] A. S. Mujumdar and W. J. M. Douglas. Analytical modelling of sheet flutter. *Svensk Papperstidning*, 79:187–192, 1976.
- [12] R. G. Parker. On the eigenvalues and critical speed stability of gyroscopic continua. *ASME Journal of Applied Mechanics*, 65:134–140, 1998.
- [13] L. Kong and R. G. Parker. Approximate eigensolutions of axially moving beams with small flexural stiffness. *Journal of Sound and Vibration*, 276:459–469, 2004.
- [14] W. L. Miranker. The wave equation in a medium in motion. *IBM Journal of Research and Development*, 4:36–42, 1960.
- [15] S. Chonan. Steady state response of an axially moving strip subjected to a stationary lateral load. *Journal of Sound and Vibration*, 107:155–165, 1986.
- [16] J. A. Wickert and C. D. Mote. Classical vibration analysis of axially moving continua. *ASME Journal of Applied Mechanics*, 57:738–744, 1990.
- [17] R. B. Bhat, G. D. Xistris, and T. S. Sankar. Dynamic behavior of a moving belt supported on elastic foundation. *Journal of Mechanical Design*, 104(1):143–147, 1982.
- [18] N. C. Perkins. Linear dynamics of a translating string on an elastic foundation. *Journal of Vibration and Acoustics*, 112(1):2–7, 1990.
- [19] J. A. Wickert. Response solutions for the vibration of a traveling string on an elastic foundation. *Journal of Vibration and Acoustics*, 116(1):137–139, 1994.
- [20] R. G. Parker. Supercritical speed stability of the trivial equilibrium of an axially-moving string on an elastic foundation. *Journal of Sound and Vibration*, 221(2):205–219, 1999.

- [21] J. A. Wickert. Non-linear vibration of a traveling tensioned beam. *International Journal of Non-Linear Mechanics*, 27(3):503–517, 1992.
- [22] J. Shen, L. Sharpe, and W. McGinley. Identification of dynamic properties of plate-like structures by using a continuum model. *Mechanics Research Communications*, 22(1):67–78, January 1995.
- [23] C. Shin, J. Chung, and W. Kim. Dynamic characteristics of the out-of-plane vibration for an axially moving membrane. *Journal of Sound and Vibration*, 286(4-5):1019–1031, September 2005.
- [24] A. Kulachenko, P. Gradin, and H. Koivurova. Modelling the dynamical behaviour of a paper web. Part I. *Computers & Structures*, 85:131–147, 2007.
- [25] A. Kulachenko, P. Gradin, and H. Koivurova. Modelling the dynamical behaviour of a paper web. Part II. *Computers & Structures*, 85:148–157, 2007.
- [26] X. Wang. Instability analysis of some fluid-structure interaction problems. *Computers & Fluids*, 32(1):121–138, January 2003.
- [27] R. Sygulski. Stability of membrane in low subsonic flow. *International Journal of Non-Linear Mechanics*, 42(1):196–202, January 2007.
- [28] Y. B. Chang and P. M. Moretti. Interaction of fluttering webs with surrounding air. *TAPPI Journal*, 74(3):231–236, 1991.
- [29] N. Banichuk, J. Jeronen, P. Neittaanmäki, and T. Tuovinen. On the instability of an axially moving elastic plate. *International Journal of Solids and Structures*, 47(1):91–99, 2010.
- [30] S. Hatami, M. Azhari, M. M. Saadatpour, and P. Memarzadeh. Exact free vibration of webs moving axially at high speed. In *AMATH'09: Proceedings of the 15th American Conference on Applied Mathematics*, pages 134–139, Stevens Point, Wisconsin, USA, 2009. World Scientific and Engineering Academy and Society (WSEAS). Houston, USA.
- [31] K. Marynowski and T. Kapitaniak. Dynamics of axially moving continua. *International Journal of Mechanical Sciences*, 81:26–41, apr 2014.
- [32] K. Marynowski. *Dynamics of the Axially Moving Orthotropic Web*, volume 38 of *Lecture Notes in Applied and Computational Mechanics*. Springer-Verlag, Germany, 2008. ISBN 978-3-540-78988-8 (print), 978-3-540-78989-5 (online).